



Plastic Plates

PRODUCT DATA SPECIFICATIONS

PRODUCT DESCRIPTION

OMG Plastic Plates are Factory Mutual and Dade County approved. OMG 2-in. (50 mm) plates should be used for lap seam fastening. OMG 3-in. (75 mm) plates should be used when fastening insulation.

All OMG plates are round and designed to be used with OMG fasteners.

APPLICATION

2-in. (50 mm) Locking Plastic Plate:

Attaches single-ply membrane to the substrate. Uses OMG #12 Standard RoofGrip®, OMG #14 Heavy Duty, CD-10 or Fluted Nail fasteners.

3-in. (75 mm) Locking Plastic Plate:

Attaches insulation to the substrate.


Uses OMG #12 Standard RoofGrip or OMG #14 Heavy Duty, fasteners.

APPROVALS

Check with roofing system manufacturer for FM and Miami-Dade approvals for specific plates.



Factory Mutual listings refer to these products as: **OMG Plastic Insulation Plate 3-in. and 2-in. Barbed Plastic Seam Plate.**

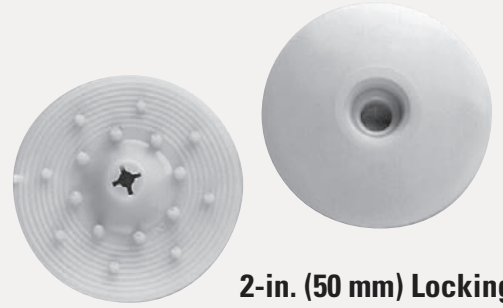

2-in. (50 mm) Locking Plastic Plate



3-in. (75 mm) Locking Plastic Plate

PHYSICAL DATA * & ORDERING INFORMATION

PRODUCT	CAT. NO.	SIZE IN (MM)	MATERIAL	PKG QTY	WEIGHT LBS (KG)
2-in LOCKING PLASTIC PLATE	NTBLP2	2 (50)	Nylon	1000	18 (8.17)
3-in LOCKING PLASTIC PLATE	PLL03	3 (75)	Polypropylene	1000	25 (11.35)

*All sizes are nominal.



ROOFING PRODUCTS

153 BOWLES ROAD, AGAWAM, MA 01001 USA
800-633-3800 413-789-0252 OMGROOFING.COM

RoofGrip® is a registered trademark of OMG, Inc. Copyright © 2018 OMG, Inc. All rights reserved.

Superior productivity.
Superior performance.

