



# Scupper RetroDrain

## PRODUCT DATA SPECIFICATIONS

### PRODUCT DESCRIPTION

Designed for existing through-wall/ side-wall or scupper drainage pipes, the aluminum and stainless steel drain components provide durability and compatibility with single ply, BUR and modified bitumen roofing systems. A metal clamping assembly creates a compression type termination in both vertical and horizontal wall flashings. The Scupper RetroDrain features the proven U-Flow Mechanical Seal for attachment to PVC or cast iron leader pipes. Available in 3-in., 4-in., 5-in. and 6-in. sizes. Custom configurations are also available.

### FEATURES & BENEFITS


- Pre-punched drain flange provides stable attachment to the wall and roof deck.
- Incorporates the original U-Flow Mechanical Seal which exceeds the ANSI/SPRI Standard for back-flow pressure.
- .125-in. metal clamping ring assembly provides a compression type termination for the vertical and horizontal roof flashings. Stainless steel studs and lock nuts secure the clamping ring assembly to the drain flange.
- .060-in thick drain strainer is easily secured to the drain body with four stainless steel wing nuts and provides protection against rooftop debris.
- Simple and easy to install, saving the contractor time and money.

### APPLICATION

OlyFlow® RetroDrains are designed to replace existing drains in reroofing applications. Installed from the roof surface, OlyFlow RetroDrains are engineered to be installed without removing the existing plumbing or fixture while providing a watertight connection to the roof system and the existing plumbing.

### APPROVALS & STANDARDS

**ANSI/SPRI RD-1** is a national performance standard for retrofit roof drains. While most retrofit drains are not tested to this standard, OlyFlow Insert Drains – including the Scupper RetroDrain – exceed the standard, which requires that the seal hold a 10-ft. column of water for 24 hours without leaking.

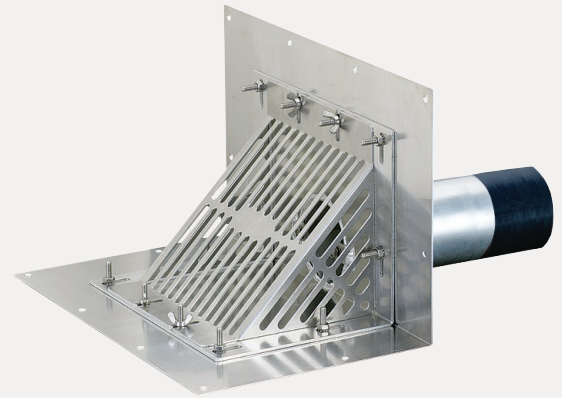

### PHYSICAL DATA

The data below is constant for all OMG Scupper RetroDrains.

DRAIN BODY	SEAL
.080-in. thick aluminum	U-Flow Mechanical Seals require a U-Flow Screwdriver for installation.
FLANGE	STRAINER DOME
16- x 10- x 10-in.	.060-in. thick aluminum
STEM	CLAMP RING
10-in. length	.125-in. thick metal

### ORDERING INFORMATION

CAT. NO.	SIZE IN	STRAINER TYPE	PKG QTY	DIMENSIONAL WEIGHT LBS
SCUPRD3-UF	3	Aluminum	1	32
SCUPRD4-UF	4	Aluminum	1	32
SCUPRD5-UF	5	Aluminum	1	32
SCUPRD6-UF	6	Aluminum	1	32



## ROOFING PRODUCTS

153 BOWLES ROAD, AGAWAM, MA 01001 USA  
800-633-3800 413-789-0252 [OMGROOFING.COM](http://OMGROOFING.COM)

OlyFlow™ is a trademark of OMG, Inc. Copyright © 2020 OMG, Inc. All rights reserved.

Superior productivity.  
Superior performance.

