


ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 911 PSF (VERTICAL) AND 526 PSF (HORIZONTAL)

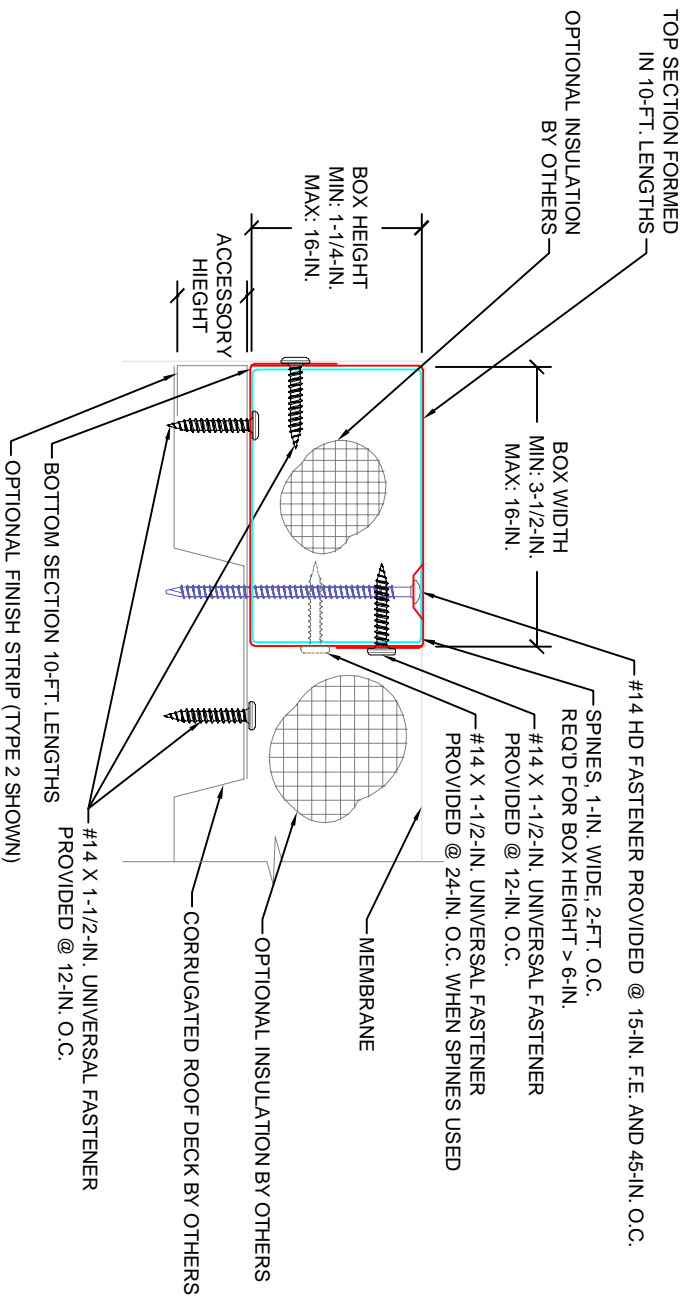

PRE-DRILL WITH 3/16-IN. DRILL BIT FOR MASONRY CONDITIONS.
CONTACT OMG FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED
ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

APPLICATIONS
SINGLE-PLY MEMBRANES

SIZES:
SEE DRAWING



NOTES:

- 1-REFER TO ROOF MEMBRANE MANUFACTURER FOR THEIR APPROVED INSTALLATION DETAIL.
- 2-TESTED IN ACCORDANCE WITH ANSI/SPRI/FM4435/ES-1.

ANSI/SPRI/FM4435/ES-1 TESTED



Approved

				OMG Inc. A Commercial Way 828-676-1700 www.omgroofing.com	
MAKE:	MODEL:	DATE:	SCALE:	SHEET:	OF:
F.L.	P.L.	03/16/2020	R1	1	1
APRIL, 2017	KCP	03/16/2020	NOT TO SCALE	1	OF 1