


ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 156 PSF (VERTICAL), AND 90 PSF (HORIZONTAL)

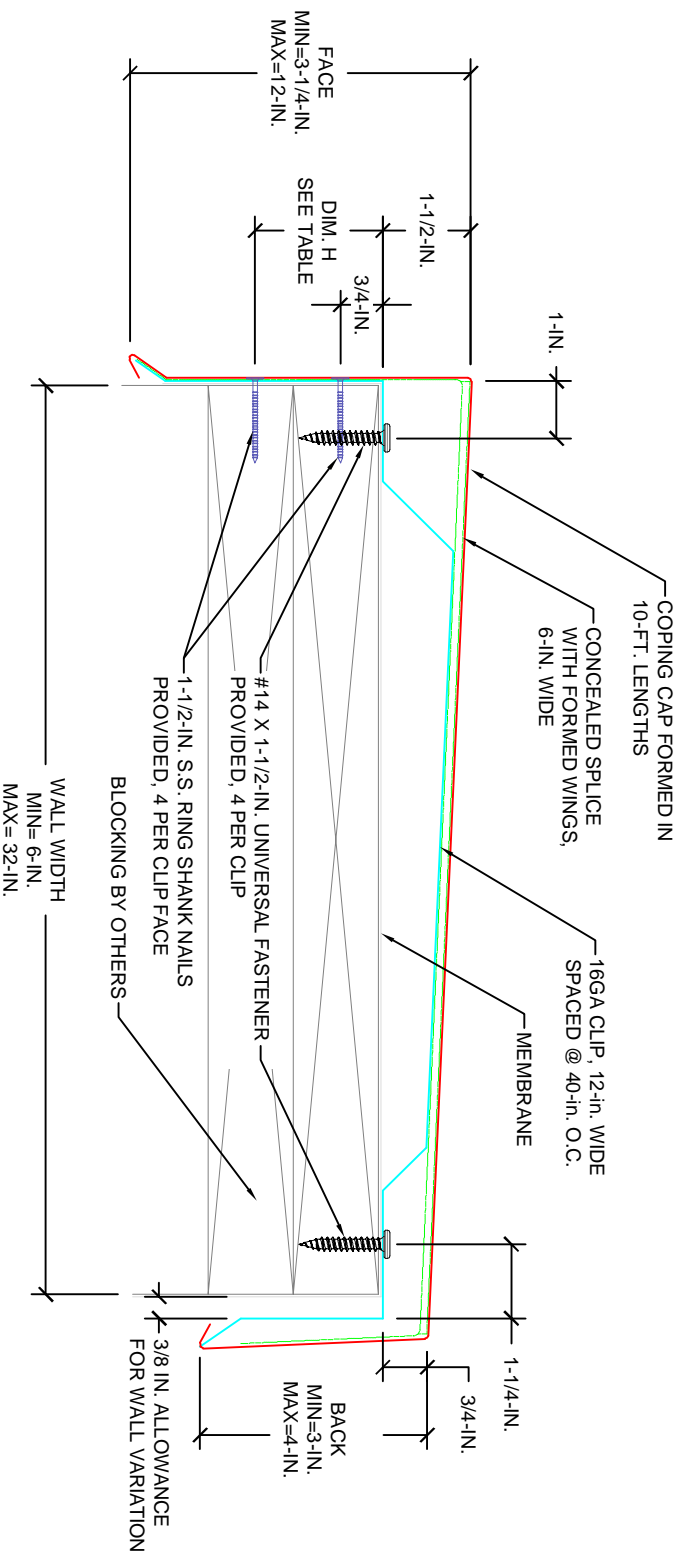

FOR MASONRY APPLICATIONS, PLEASE CONTACT OMG.
 CONTACT OMG FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED
 ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

FACE SIZE	DIM. H
FACE < 4-3/4-IN.	3/4-IN.
4-3/4-IN. ≤ FACE ≤ 7-1/2-IN.	2-1/4-IN.
7-1/2-IN. < FACE ≤ 9-IN.	3-3/4-IN.
9-IN. < FACE ≤ 10-1/2-IN.	5-1/4-IN.
10-1/2-IN. < FACE ≤ 12-IN.	6-3/4-IN.

APPLICATIONS
 SINGLE-PLY MEMBRANES
 MODIFIED BITUMEN
 BUR

SIZES:
 SEE DRAWING

NOTES:
 1-REFER TO ROOF MEMBRANE MANUFACTURER FOR THEIR APPROVED INSTALLATION DETAIL.
 2-TESTED IN ACCORDANCE WITH ANSI/SPRI/FM4435/ES-1.

ANSI/SPRI/FM4435/ES-1 TESTED

OMG
 Edgesystems
 A Commercial Way
 828-676-1700
 www.omgroofing.cc

OMG Inc.
 A Commercial Way
 828-676-1700
 www.omgroofing.cc

MADE IN THE USA

PERMASNAP PLUS COPING

DATE: 02/20/2020

SCALE: NOT TO SCALE

SHEET: 1 OF 1