


ANSI/SPRI/FM4435/ES-1 TEST PRESSURES UP TO 260 PSF (HORIZONTAL)



PRE-DRILL WITH 3/16-IN. DRILL BIT FOR MASONRY CONDITIONS.  
 CONTACT OMG FOR APPROPRIATE RECOMMENDATIONS NEEDED TO MEET/EXCEED  
 ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA

APPLICATIONS  
 SINGLE-PLY MEMBRANES

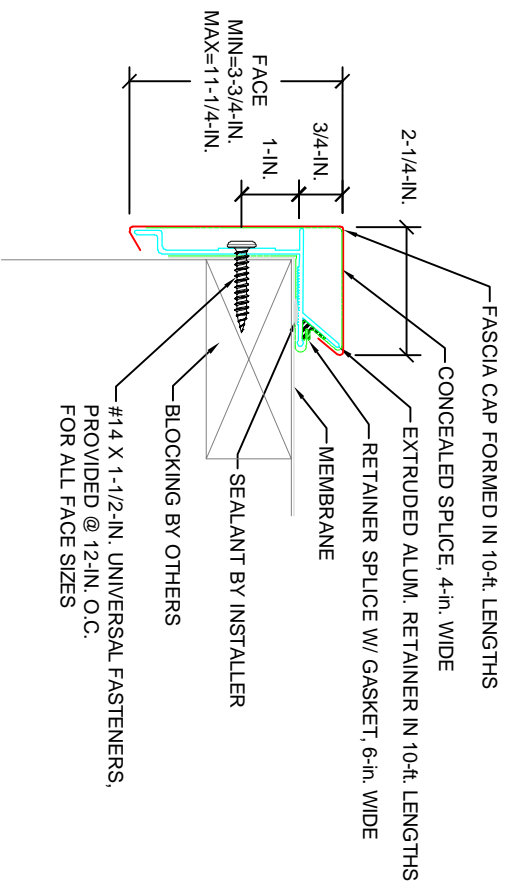

SIZES:  
 SEE DRAWING

NOTES:  
 1-REFER TO ROOF MEMBRANE MANUFACTURER FOR  
 THEIR APPROVED INSTALLATION DETAIL.  
 2-TESTED IN ACCORDANCE WITH  
 ANSI/SPRI/FM4435/ES-1.

ANSI/SPRI/FM4435/ES-1 TESTED



Approved

|   |  |   |                    |  |  |
|---|--|---|--------------------|--|--|
|  |  |  |                    | OMG Inc.<br>A Commercial Way<br>828-676-1700<br>www.omgroofing.com |  |
| MADE<br>DRAWN BY: F.L.<br>APRIL, BY: KCP  | TERMINEDGE EX FASCIA<br>DATE: 02/14/2020<br>DATE: 02/14/2020 | SMO<br>SCALE:   | EX<br>NOT TO SCALE | SHEETS: 1 OF 1   |  |